



Lukijan valo seuraa sisääntulon tilaa (vihreä ja punainen)

Lukijan valo seuraa sisääntulon tilaa (vihreä ja punainen)


Ovi 1 vaihtaa releen tilaa ON/OFF kulcutunnisteen lukemisella

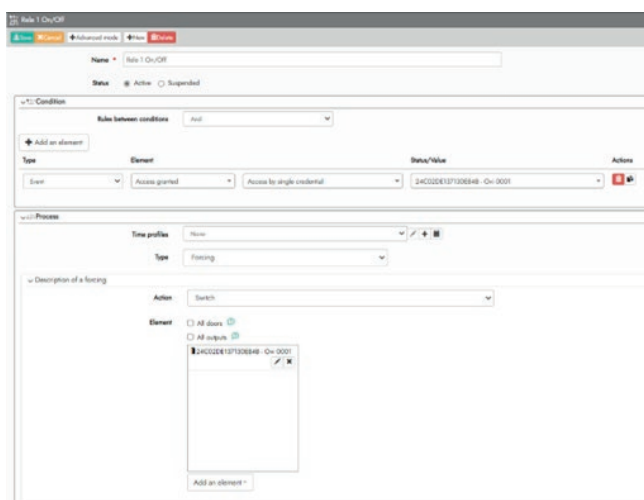

Input 1 ollessa päällä lukija pakottaa tilan muokatuksi 1 käyttäytymiseksi (Punainen valo)

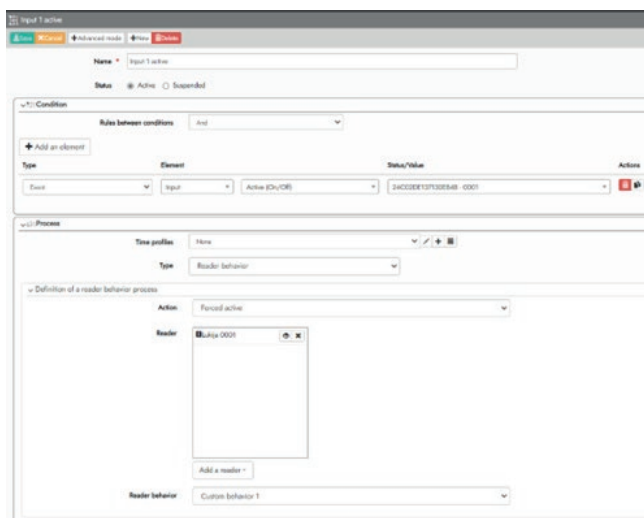

Input 1 ollessa pois päältä lukija pakottaa tilan ei-aktiiviseksi (Lukijaan profiili Pakotettu ovi / vapaa pääsy -tila valo syttyy)

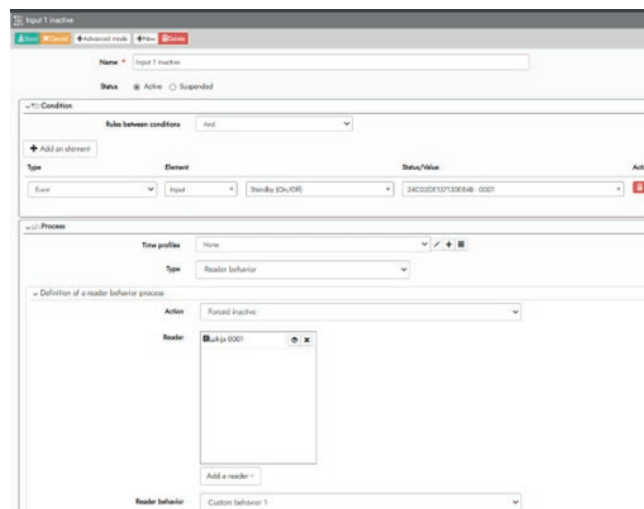

Käy lisäämässä lukijalle muokattu lukijaprofiili ja lisää siihen Mukautettu käyttäytyminen 1.

Valitse lukijan väriksi punainen ja FIX (valopalaa jatkuvasti) Vaihda Pakotettu ovi / vapaa pääsy kohtaan vihreä.

Name	LED	Blinking	Duration	Buzzer
Normal behavior	Green	Fix		
Access granted	Green	Fix	Event	Long tone
Access denied	Red	Quick	Seconds	3 short tones
Exit for double identification	Orange	Off	Event	Off
Door open for too long	Orange	Off	Event	Off
Forced door	Green	Fix	Event	Off
Forced door / free access	Green	Fix	Event	Off
Reader timeout	Red	Off	Event	Off
Double entry	Green	Off	Seconds	3 short tones
Custom behavior 1	Red	Fix	Seconds	3 short tones