


## HARPER 320

Cod. HP320AA000340



### Introduction

HARPER320 series self-contained LED signalling light with self-extinguishing RAL9003 white polycarbonate body and PMMA diffuser. Wall, flag, ceiling/false ceiling, suspended mount. Power supply 220/230 Vac, 50-60 Hz. Type Maintained; luminosity settable in Maintained mode. Rechargeable LiFePO<sub>4</sub> battery @ 1.5Ah included; charging time 6 h; minimum autonomy 3 h. Function/Malfunction signalling LEDs. Protection rating IP40, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 176.5 x 217 x 41 mm.

### Description

Product series	HARPER 320
Product type	Signalling luminaire
Version	Self-Test (Self-diagnosis)
Type	Maintained
Dimensions	Height 176.5 mm, Length 217 mm, Depth 41 mm

### Technical specifications


Installation	Wall, flag, ceiling, false ceiling, suspended mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	3.5 W
Maximum absorbed power in VA	5.5 VA
Battery	N.1 LiFePO <sub>4</sub> 3.2 V 1.5 Ah
Autonomy	3 h
Total charging time	6 h

Visibility distance	20 m
Light source	LED
Number of LEDs	10
Colour temperature	6000 K

Body	RAL9003 White Polycarbonate
Glow wire	850 °C
Diffuser	Silk-screened PMMA (sold separately/accessory)
IP Protection rating	IP40
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Additional information	Dedicated terminals for <i>inhibit mode</i> and <i>rest mode</i> Test button and brightness dimmer
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 62471 EN 1838, ISO3864-4, ISO 7010
Photobiological risk	RG0 (exempt) according to EN 62471

## HARPER 320

Cod. HP320BA000340



### Introduction

HARPER320 series self-contained LED signalling light with self-extinguishing RAL9003 white polycarbonate body and PMMA diffuser. Wall, flag, ceiling/false ceiling, suspended mount. Power supply 220/230 Vac, 50-60 Hz. Type Maintained; luminosity settable in Maintained mode. Rechargeable LiFePO<sub>4</sub> battery @ 1.5Ah included; charging time 6 h; minimum autonomy 3 h. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP40, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 176.5 x 217 x 41 mm.

### Description

Product series	HARPER 320
Product type	Signalling luminaire
Version	BUS supervised
Type	Maintained
Dimensions	Height 176.5 mm, Length 217 mm, Depth 41 mm

### Technical specifications



Installation	Wall, flag, ceiling, false ceiling, suspended mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	3.5 W
Maximum absorbed power in VA	5.5 VA
Battery	N.1 LiFePO <sub>4</sub> 3.2 V 1.5 Ah
Autonomy	3 h
Total charging time	6 h
Visibility distance	20 m
Light source	LED
Number of LEDs	10
Colour temperature	6000 K
Body	RAL9003 White Polycarbonate
Glow wire	850 °C
Diffuser	Silk-screened PMMA (sold separately/accessory)
IP Protection rating	IP40
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Additional information	Test button and brightness dimmer
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 62471 EN 1838, ISO3864-4, ISO 7010
Photobiological risk	RG0 (exempt) according to EN 62471

### INIM ELECTRONICS s.r.l.

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepredone (AP) ITALY  
Tel. +39 0735 705007 Fax +39 0735 704912 [info@inim.biz](mailto:info@inim.biz) [www.inim.biz](http://www.inim.biz)

## HARPER 320

Cod. HP320LA000040

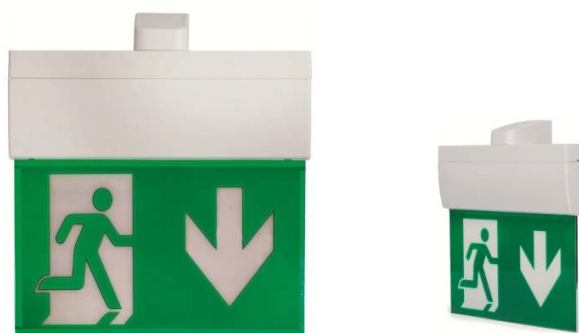

### Introduction

HARPER320 series LED signalling light for centralized power supply system with self-extinguishing RAL9003 white polycarbonate body and PMMA diffuser. Wall, flag, ceiling/false ceiling, suspended mount. Power supply 220/230 Vac, 50-60 Hz. Protection rating IP40, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 176.5 x 217 x 41 mm.

### Description

Product series	HARPER 320
Product type	Signalling luminaire
Version	Central Battery (centralized power supply)
Type	-
Dimensions	Height 176.5 mm, Length 217 mm, Depth 41 mm

### Technical specifications

Installation	Wall, flag, ceiling, false ceiling, suspended mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	1.7 W
Maximum absorbed power in VA	2.8 VA
Battery	-
Autonomy	-
Total charging time	-
Visibility distance	20 m
Light source	LED
Number of LEDs	10
Colour temperature	6000 K
Body	RAL9003 White Polycarbonate
Glow wire	850 °C
Diffuser	Silk-screened PMMA (sold separately/accessory)
IP Protection rating	IP40
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 62471 EN 1838, ISO3864-4, ISO 7010
Photobiological risk	RG0 (exempt) according to EN 62471